


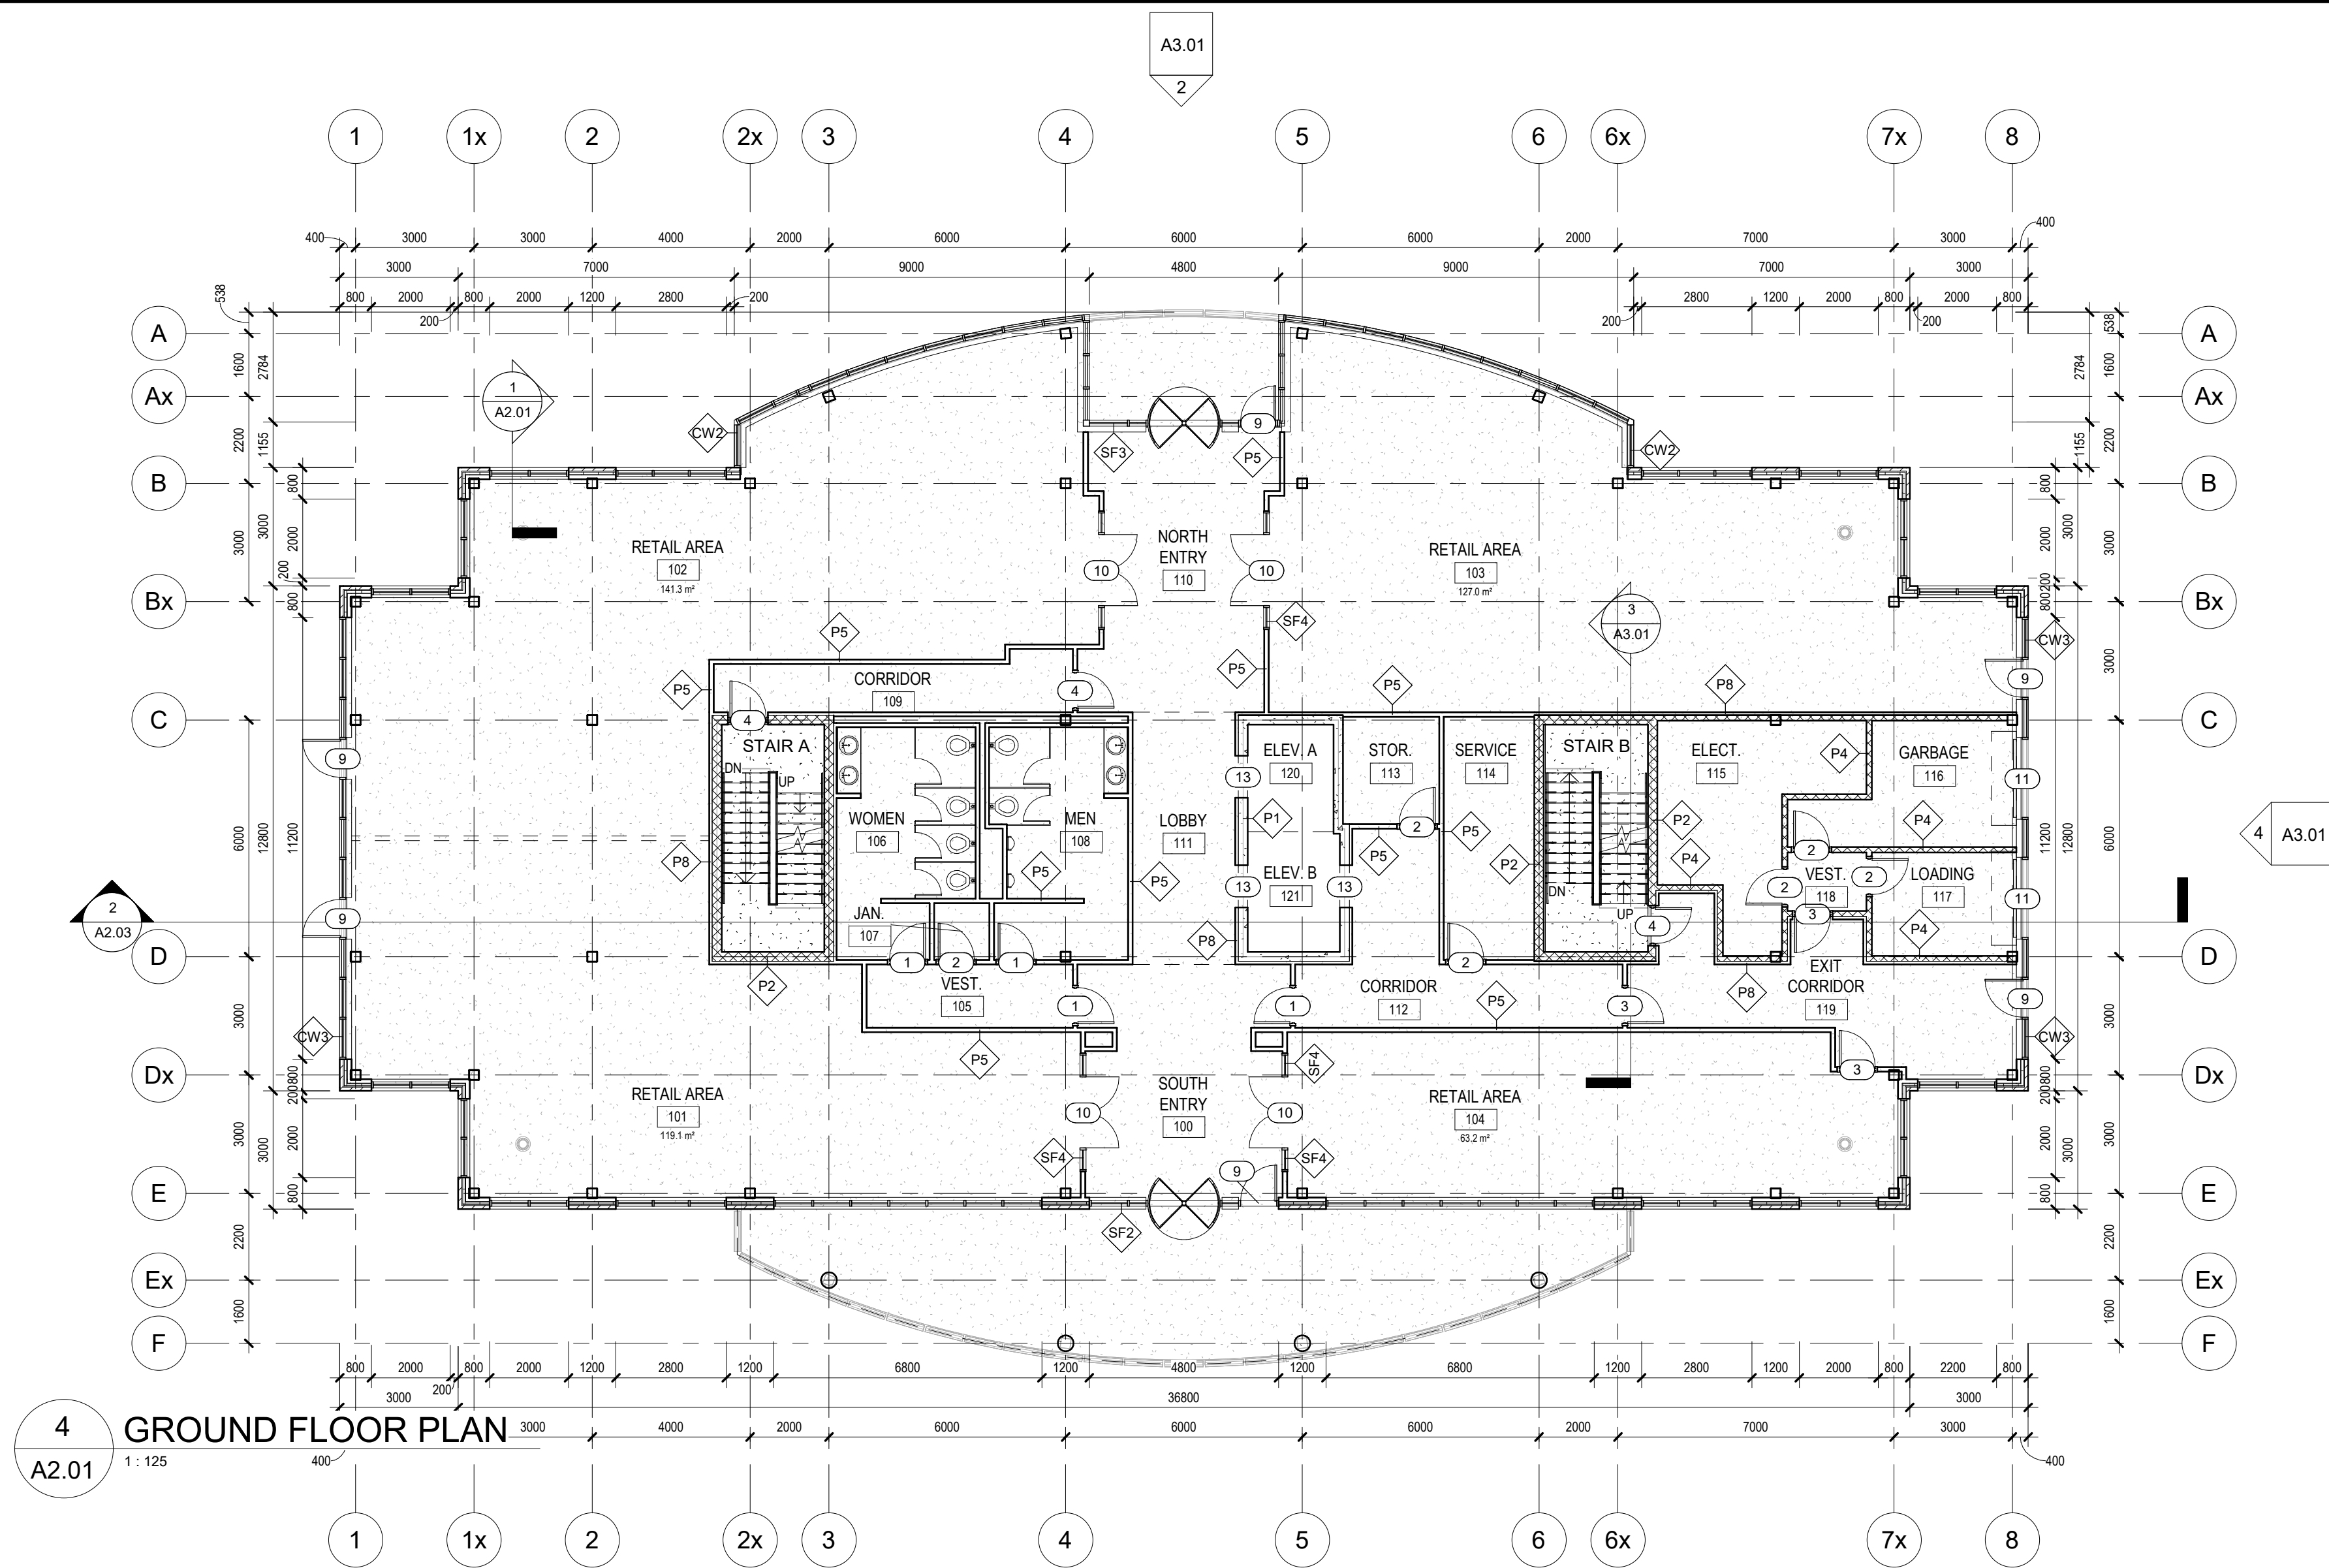

4 GROUND FLOOR PLAN

A2.01 1:125

#### EXTERIOR WALL TYPES

- W1** ACET EXTERIOR - BRICK ON MTL. STUD  
90MM BRICK  
25MM AIR SPACE  
64MM RIGID INSULATION  
AIR BARRIER  
13MM GFRG  
92 METAL STUDS @ 406MM O/C  
13MM GYPSUM BOARD
- W2** ACET CONCRETE - 300MM  
300MM CONCRETE
- W3** RESERVED  
RESERVED
- W4** RESERVED  
RESERVED
- W5** ACET CMU - ROOF CURB  
2MM EPDM ROOF MEMBRANE  
64 RIGID INSULATION  
VAPOUR RETARDER  
190MM CONCRETE MASONRY UNITS
- W6** ACET CURTAIN WALL - PARAPET CURB  
2MM EPDM ROOF MEMBRANE  
64 RIGID INSULATION  
VAPOUR RETARDER  
13MM GFRG  
152 METAL STUDS @ 406MM O/C
- W7** ACET - BRICK PARAPET  
90MM BRICK  
25MM AIR SPACE  
64MM RIGID INSULATION  
AIR BARRIER  
140MM CONCRETE MASONRY UNITS  
VAPOUR RETARDER  
64MM RIGID INSULATION  
2MM EPDM ROOF MEMBRANE
- W8** ACET - CURTAIN WALL PARAPET  
19MM METAL PANEL  
64MM RIGID INSULATION  
VAPOUR RETARDER  
13MM GFRG  
152MM METAL STUDS @ 406MM O/C
- W9** ACET - CURTAIN WALL PARAPET 2  
2MM EPDM ROOF MEMBRANE  
64MM RIGID INSULATION  
VAPOUR RETARDER  
13MM GFRG  
92MM METAL STUDS @ 406MM O/C

#### INTERIOR WALL TYPES

- P1** ACET CONCRETE - 240MM  
240MM CONCRETE
- P2** ACET CMU - 240MM  
240MM CONCRETE MASONRY UNITS
- P3** ACET CMU - 190MM  
190MM CONCRETE MASONRY UNITS
- P4** ACET CMU - 140MM  
140MM CONCRETE MASONRY UNITS
- P5** ACET INTERIOR - 118MM PARTITION  
13MM GYPSUM BOARD  
92MM METAL STUDS @ 406MM O/C  
13MM GYPSUM BOARD
- P6** ACET INTERIOR - 124MM PARTITION - 1HR RATED  
16MM TYPE X GYPSUM BOARD  
92MM METAL STUDS @ 406MM O/C  
16MM TYPE X GYPSUM BOARD
- P7** ACET INTERIOR - 92MM PARTITION 1 SIDED  
13MM GYPSUM BOARD  
92MM METAL STUDS @ 406MM O/C
- P8** ACET INTERIOR - 64MM PARTITION 1 SIDED  
13MM GYPSUM BOARD  
64MM METAL STUDS @ 406MM O/C
- P9** RESERVED  
RESERVED

#### FLOOR TYPES


- F1** ACET CONCRETE SLAB ON GRADE - 125MM  
125MM CONCRETE SLAB ON 150 COMPACTED GRANULAR BASE
- F2** ACET CORESLAB - 203MM  
203MM PRECAST HOLLOWCORE CONCRETE

#### ROOF TYPES

- R1** ACET ROOFING W/ SLOPING TOPPING  
2MM TPO ROOF MEMBRANE  
89MM RIGID INSULATION  
VAPOUR RETARDER  
100MM MIN. SLOPING CONCRETE TOPPING (SLOPING MIN 2% TO DRAIN)
- R2** ACET ROOF ON METAL DECK  
2MM TPO ROOF MEMBRANE  
100MM RIGID INSULATION  
VAPOUR RETARDER  
38MM METAL ROOF DECKING

### WALL FLOOR ROOF SCHEDULE

1:50

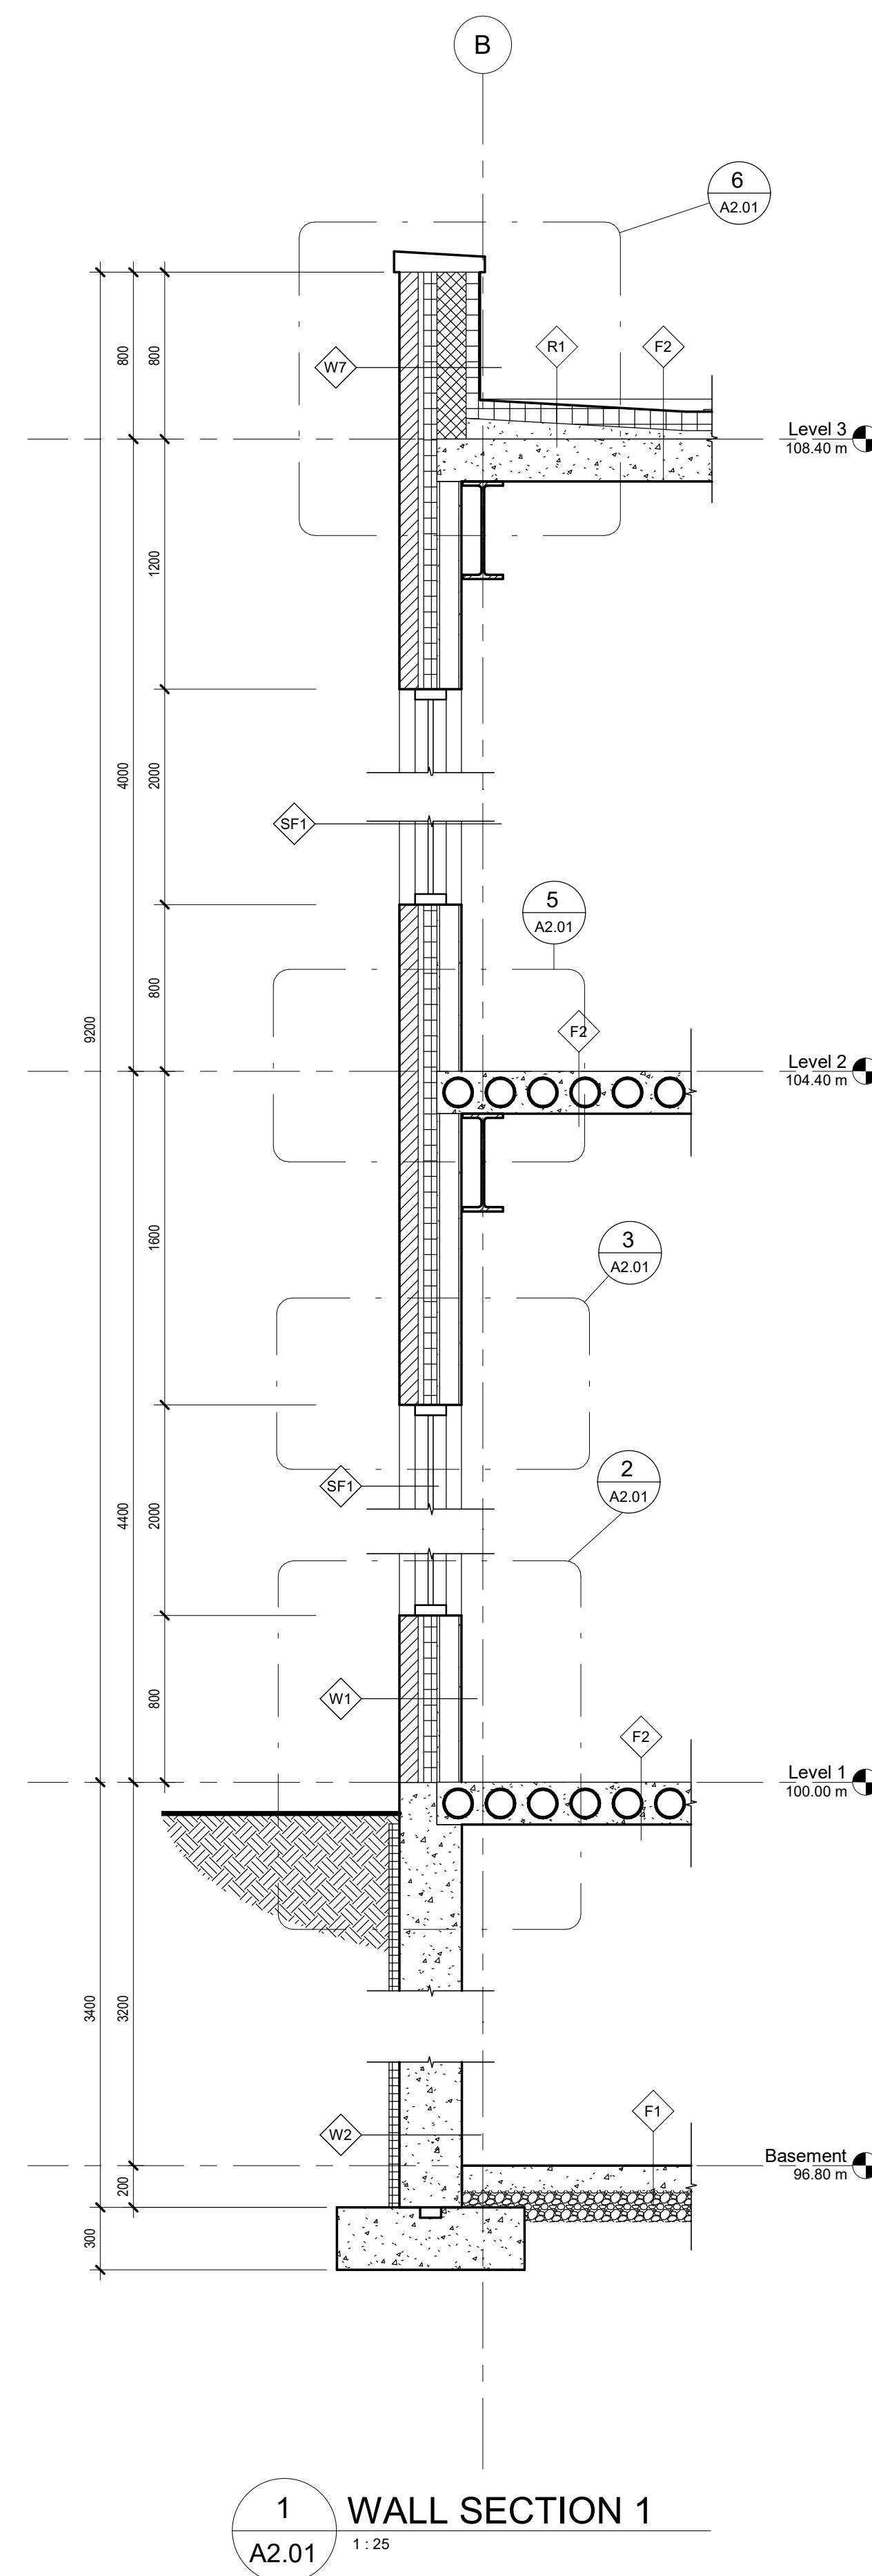

1 WALL SECTION 1

A2.01 1:25

6 DETAIL - PARAPET

A2.01 1:10

5 DETAIL FLOOR/WALL

A2.01 1:10

3 DETAIL - WINDOW HEAD

A2.01 1:10

2 DETAIL - BASE & SILL

A2.01 1:10



BIM2 (ARCH2105)  
Major Project - 4 Storey  
Office Bldg.

ALL DIMENSIONS AND INFORMATION SHALL BE CHECKED AND VERIFIED ON THE JOB AND ANY DISCREPANCIES MUST BE REPORTED TO THE CONSULTANT BEFORE COMMENCING WORK.  
ALL DRAWINGS REMAIN THE PROPERTY OF THE CONSULTANT AND MAY NOT BE REPRODUCED OR REVISED WITHOUT THE CONSULTANT'S PERMISSION.

Floor Plan, Section & Details

Project Number 2020.01  
Date Oct. 6, 2020  
Drawn by Author  
Checked by Checker  
Scale As indicated

Sheet No.  
**A2.01**

2020-11-16 8:45:49 PM